




Alpha Disc Lock Baton Specification Sheet

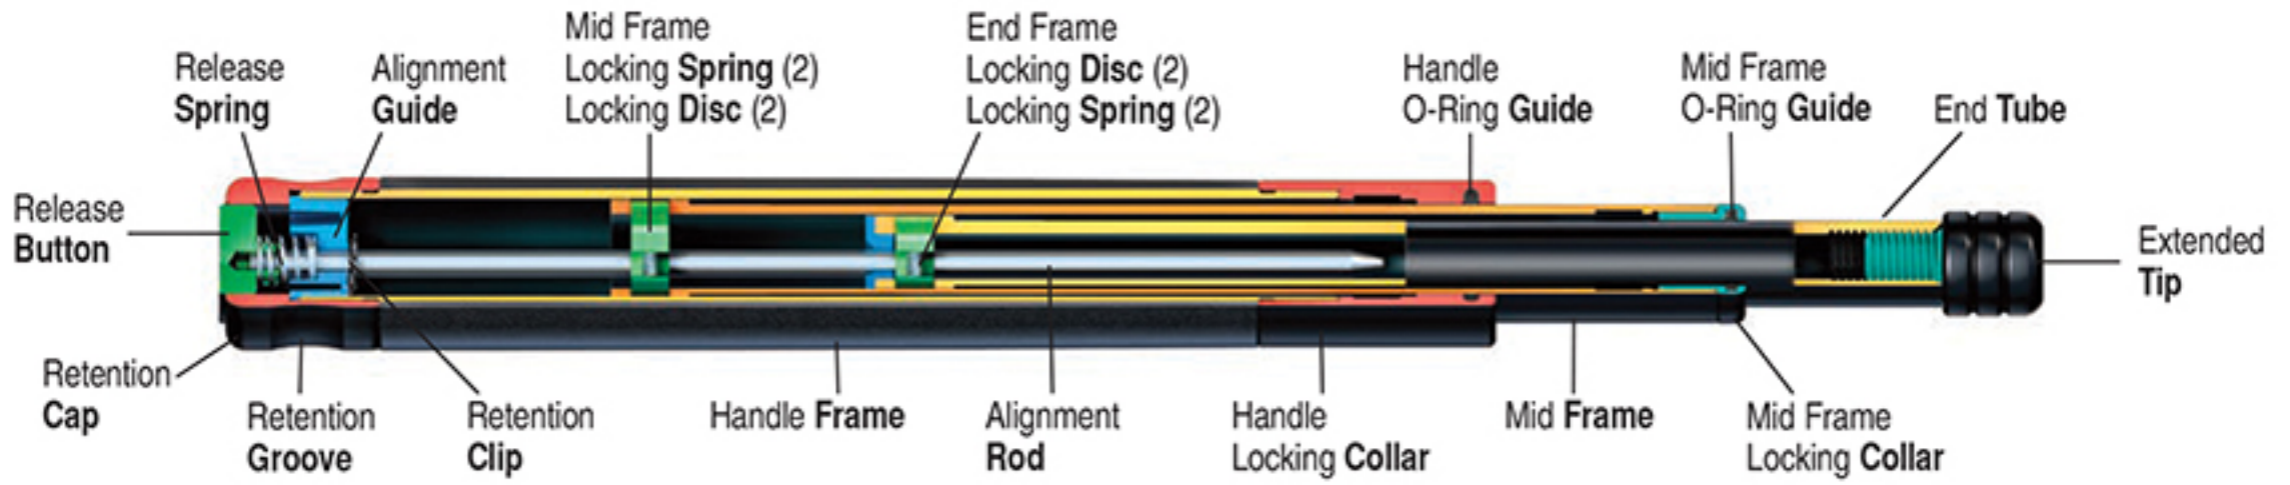

Background

High carbon steel tubing
Precision machined
Heat treated

Specifications

Retracted Length Standard Tip		
40	7.06"	17.93 cm
50	8.40"	21.35cm
60	9.63"	24.45 cm
Expanded Length Standard Tip		
40	15.75"	40 cm
50	19.79"	50 cm
60	23.62"	60 cm
Weight (Steel) Standard Tip		
40	16.3 oz	.462 kg
50	18.3 oz	.519 kg
60	21.4 oz	.607 kg
Handle Dia.	1.06"	2.7 cm

Shafts

Cerakote
Multiple Color Options
FDE
OD Green
Graphite Black

Locking Bushing

Hardened locking
groove O-ring guide

Locking Lugs

Opposing Discs
Coil spring activated

Handle

Foamed vinyl grip
Protective front collar

Button Release

Retention groove Machined into the cap contour
Optional laser engraved logo

Steel Tubing

4130 (4140 special order alternate)
49-52 RC
238,000 PSI
Tensile 215,000
PSI Yield

Locking System Disc Lock with Dual Opposing Discs US Pat.# 8721459 EU Pat.# CH2604966

Options

Control Tip (pictured below) - Additional length 1.25" 3.17cm - Additional Weight .48 oz (.034kg)
Safety Cap (pictured) - No Additional length - weight reduced by .4oz (.012kg)
Specialized Laser Engraving Available

UTT reserves the right to make product improvements/adjustments



PROUDLY MADE IN USA

